

## 2-Electrode Gas Discharge Tube (GDT)

### 2RXXXL-5 Series

#### Description

Gas discharge Tubes (GDT) are classical components for protecting the installations of the telecommunications. It is essential that IT and telecommunications systems -with their high-grade but sensitive electronic circuits - be protected by arresters. They are thus fitted at the input of the power supply system together with varistors and at the connection points to telecommunication lines. They have become equally indispensable for protecting base stations in mobile telephone systems as well as extensive cable television (CATV) networks with their repeaters and distribution systems.

These protective components are also indispensable in other sectors, In AC power transmission systems, they are often used with current-limiting varistors, In customer premises equipment such as DSL modems, WLAN routers, TV sets and cable modems In air-conditioning equipment, the integral black-box concept offers graduated protection by combining arresters with varistors, PTC, diodes and inductor.

#### Features

- ◆ Non-Radioactive
- ◆ Low insertion loss
- ◆ Excellent response to fast rising transients
- ◆ Ultra low capacitance
- ◆ 5KA surge capability tested with 8/20µs pulse as defined by IEC 61000-4-5

#### Applications

- ◆ Communication equipment
- ◆ CATV equipment
- ◆ Test equipment
- ◆ Data lines
- ◆ Power supplies
- ◆ Telecom SLIC protection
- ◆ Broadband equipment
- ◆ ADSL equipment, including ADSL2+
- ◆ XDSL equipment
- ◆ Satellite and CATV equipment
- ◆ Consumer electronics

2RXXXLL-5



2RXXXL-5



#### Schematic Symbol



#### Product Characteristics


Materials	Nickel-plated with Tinplated wires	
Product Marking	<b>GDT    XXXL</b> XXX    -Nominal voltage L        -5KA	
Glow to Arc Transition Current	< 0.5 Amps	
Glow Voltage	~60 Volts	
Storage and Operational Temperature	-40 to +90°C	
Climatic category (IEC 60068-1)	40/90/21	
Weight	2RXXXLL-5	~1.0g
	2RXXXL-5	~0.85g

## 2-Electrode Gas Discharge Tube (GDT)


### 2RXXXL-5 Series

#### Dimensions (Unit: mm)

Axial Leaded Devices (2RXXXLL-5)

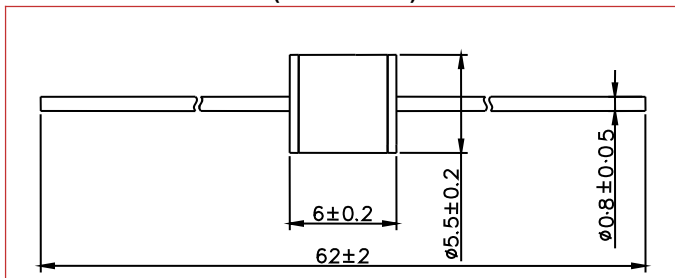

Without wire Devices (2RXXXL-5)

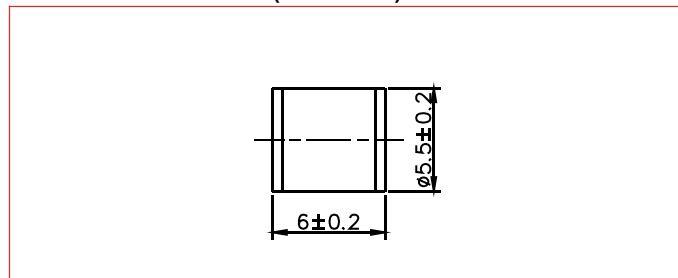

#### Electrical Characteristics

Part Number	Marking	DC Spark-over Voltage	Maximum Impulse Spark-over Voltage		Minimum Insulation Resistance	Maximum Capacitance	Arc Voltage	Service Life			
			@100V/S	@100V/μs	@1KV/μs			Nominal Impulse Discharge Current	Max Impulse Discharge Current	Nominal Alternating Discharge Current	Impulse Life
						@1MHz	@1A	@8/20μs ±5 times	@8/20μs 1 time	@50Hz 1 Sec 10 times	@10/1000μs 300 times
2R075LL-5 2R075L-5	GDT 75L	75V±30%	<500V	<600V	1 GΩ (at 25V)	<1.0pF	~15V	5KA	10KA	5A	100A
2R090LL-5 2R090L-5	GDT 90L	90V±30%	<500V	<600V	1 GΩ (at 50V)	<1.0pF	~15V	5KA	10KA	5A	100A
2R150LL-5 2R150L-5	GDT 150L	150V±30%	<500V	<600V	1 GΩ (at 50V)	<1.0pF	~20V	5KA	10KA	5A	100A
2R230LL-5 2R230L-5	GDT 230L	230V±30%	<600V	<700V	1 GΩ (at 100V)	<1.0pF	~20V	5KA	10KA	5A	100A
2R250LL-5 2R250L-5	GDT 250L	250V±30%	<700V	<800V	1 GΩ (at 100V)	<1.0pF	~20V	5KA	10KA	5A	100A
2R300LL-5 2R300L-5	GDT 300L	300V±30%	<800V	<900V	1 GΩ (at 100V)	<1.0pF	~20V	5KA	10KA	5A	100A
2R350LL-5 2R350L-5	GDT 350L	350V±30%	<800V	<900V	1 GΩ (at 100V)	<1.0pF	~20V	5KA	10KA	5A	100A
2R420LL-5 2R420L-5	GDT 420L	420V±30%	<900V	<1000V	1 GΩ (at 100V)	<1.0pF	~20V	5KA	10KA	5A	100A
2R470LL-5 2R470L-5	GDT 470L	470V±30%	<900V	<1000V	1 GΩ (at 100V)	<1.0pF	~20V	5KA	10KA	5A	100A
2R600LL-5 2R600L-5	GDT 600L	600V±30%	<1100V	<1200V	1 GΩ (at 100V)	<1.0pF	~20V	5KA	10KA	5A	100A
2R800LL-5 2R800L-5	GDT80 0L	800V±30%	<1200V	<1400V	1 GΩ (at 100V)	<1.0pF	~20V	5KA	10KA	5A	100A


**Notes:**

- 1). Terms in accordance with ITU-T K.12 and GB/T 9043-2008
- 2). At delivery AQL 0.65 level II, DIN ISO 2859



## 2-Electrode Gas Discharge Tube (GDT)

### 2RXXL-5 Series

#### Electrical Rating

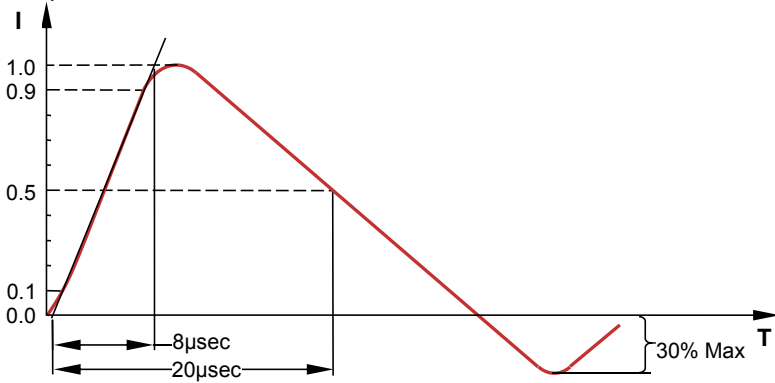Item	Test Condition / Description	Requirement
<b>DC Spark-over Voltage</b>	The voltage is measured with a slowly rate of rise $dv / dt = 100V/s$	To meet the specified value
<b>Impulse Spark-over Voltage</b>	The maximum impulse spark-over voltage is measured with a rise time of $dv / dt = 100V/\mu s$ or $1KV/\mu s$	
<b>Insulation Resistance</b>	The resistance of gas tube shall be measured each terminal each other terminal, please see above spec.	
<b>Capacitance</b>	The capacitance of gas tube shall be measured each terminal to each other terminal. Test frequency : 1MHz	
<b>Nominal Impulse Discharge Current</b>	<p>The maximum current applying a waveform of 8/20<math>\mu s</math> that can be applied across the terminals of the gas tube. One hour after the test is completed, re-testing of the DC spark-over voltage does not exceed <math>\pm 30\%</math> of the nominal DC spark-over voltage. Dwell time between pulses is 3 minutes.</p> 	
<b>Nominal Alternating Discharge Current</b>	Rated RMS value of AC current at 50Hz, 1 sec. 10 times. Intervals: 3min. The DC spark-over voltage does not exceed $\pm 30\%$ of the nominal DC spark-over voltage. $IR > 10^8 ohms$ .	

#### Recommended Soldering Profile

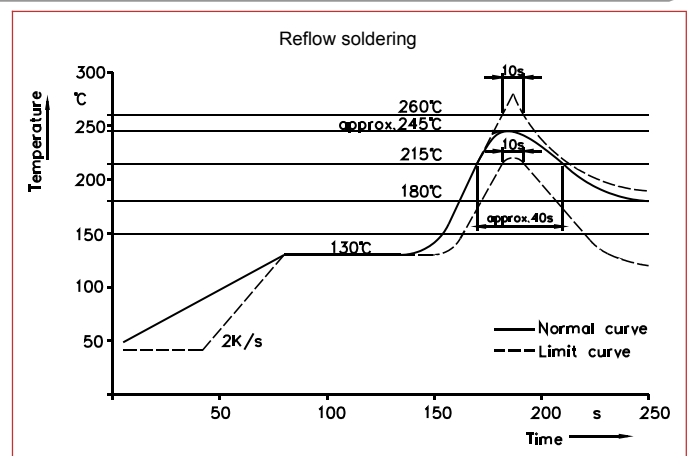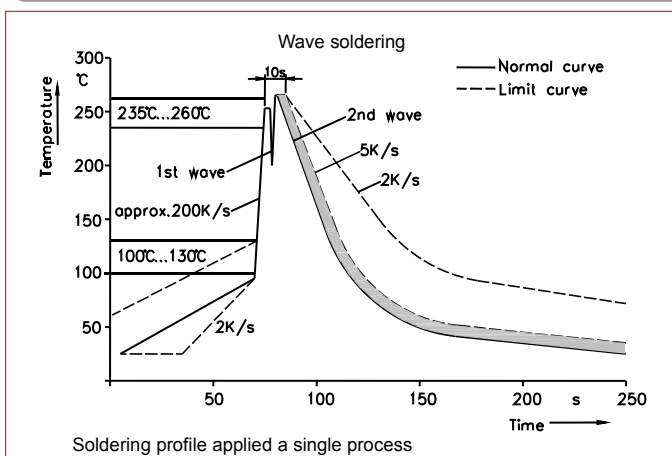

#### Soldering Parameters - Hand Soldering


Solder Iron Temperature: 350 $^{\circ}C$   $\pm 5^{\circ}C$

Heating Time: 5 seconds max.

## 2-Electrode Gas Discharge Tube (GDT)

### 2RXXXL-5 Series


#### Part Numbering

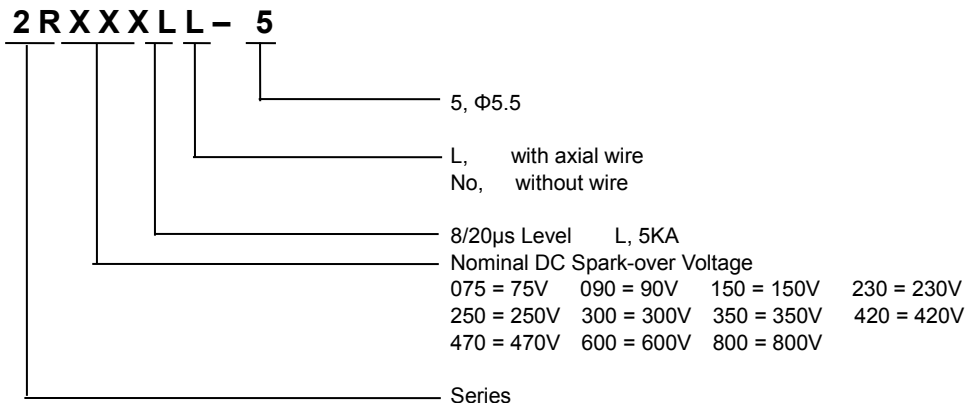


#### Packaging Information

Part Number	Description	Quantity
2RXXXLL-5	100PCS per Tray, 10 Trays / Inner Carton	1000 PCS
2RXXXL-5	100PCS per Tray, 10 Trays / Inner Carton	1000 PCS

Tray used in 2RXXXLL-5

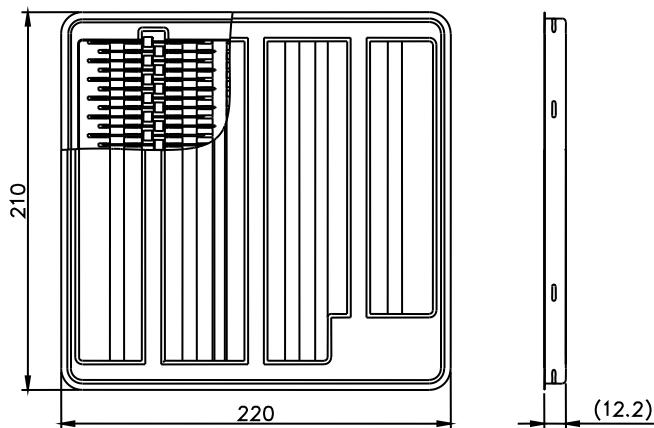

Tray used in 2RXXXL-5

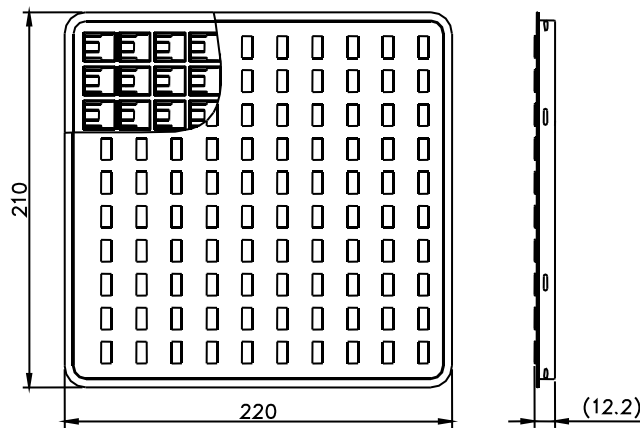

#### Cautions and Warnings

- ◆ Gas discharge tubes (GDT) must not be operated directly in power supply networks.
- ◆ Gas discharge tubes (GDT) may become hot in case of longer periods of current stress (danger of burning).
- ◆ Gas discharge tubes (GDT) may be used only within their specified values. In the event of overload, the head contacts may fail or the component may be destroyed.
- ◆ Damaged Gas discharge tubes (GDT) must not be re-used.