




## SOD-123 Plastic-Encapsulate Diodes


### SD103AW-SD103CW Schottky Barrier Diode

#### FEATURES

- Low Forward Voltage Drop
- Guard Ring Construction for Transient Protection
- Negligible Reverse Recovery Time
- Low Capacitance

#### MARKING:

| SD103AW:S4                                                                        | SD103BW:S5                                                                        | SD103CW:S6                                                                        |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|  |  |  |

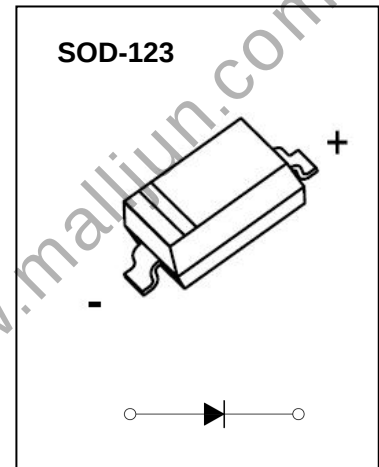

The marking bar indicates the cathode  
Solid dot = Green molding compound device, if none,  
the normal device.

#### MAXIMUM RATINGS ( $T_a=25^{\circ}\text{C}$ unless otherwise noted )


| Symbol          | Parameter                                                   | Value         |         |         | Unit                        |
|-----------------|-------------------------------------------------------------|---------------|---------|---------|-----------------------------|
|                 |                                                             | SD103AW       | SD103BW | SD103CW |                             |
| $V_{RRM}$       | Peak Repetitive Reverse Voltage                             | 40            | 30      | 20      | V                           |
| $V_{RWM}$       | Working Peak Reverse Voltage                                |               |         |         |                             |
| $V_{R(RMS)}$    | RMS Reverse Voltage                                         | 28            | 21      | 14      | V                           |
| $I_{FM}$        | Forward Continuous Current                                  | 350           |         |         | mA                          |
| $I_{FSM}$       | Non-repetitive Peak Forward Surge Current@ $t=8.3\text{ms}$ | 2             |         |         | A                           |
| $P_D$           | Power Dissipation                                           | 400           |         |         | mW                          |
| $R_{\theta JA}$ | Thermal Resistance from Junction to Ambient                 | 250           |         |         | $^{\circ}\text{C}/\text{W}$ |
| $T_j$           | Junction Temperature                                        | 125           |         |         | $^{\circ}\text{C}$          |
| $T_{stg}$       | Storage Temperature                                         | $-55\sim+150$ |         |         | $^{\circ}\text{C}$          |

#### ELECTRICAL CHARACTERISTICS( $T_a=25^{\circ}\text{C}$ unless otherwise specified)


| Parameter             | Symbol     | Test conditions                                             | Min | Typ | Max  | Unit          |
|-----------------------|------------|-------------------------------------------------------------|-----|-----|------|---------------|
| Reverse voltage       | $V_{(BR)}$ | $I_R=100\mu\text{A}$ SD103AW                                | 40  |     |      | V             |
|                       |            | SD103BW                                                     | 30  |     |      |               |
|                       |            | SD103CW                                                     | 20  |     |      |               |
| Reverse current       | $I_R$      | $V_R=30\text{V}$ SD103AW                                    |     |     | 5    | $\mu\text{A}$ |
|                       |            | $V_R=20\text{V}$ SD103BW                                    |     |     |      |               |
|                       |            | $V_R=10\text{V}$ SD103CW                                    |     |     |      |               |
| Forward voltage       | $V_F$      | $I_F=20\text{mA}$                                           |     |     | 0.37 | V             |
|                       |            | $I_F=200\text{mA}$                                          |     |     | 0.6  |               |
| Total capacitance     | $C_{tot}$  | $V_R=0\text{V}, f=1\text{MHz}$                              |     | 50  |      | pF            |
| Reverse recovery time | $t_{rr}$   | $I_F=I_R=200\text{mA}, I_{rr}=0.1\times I_R, R_L=100\Omega$ |     | 10  |      | ns            |

## Typical Characteristics


### Forward Characteristics

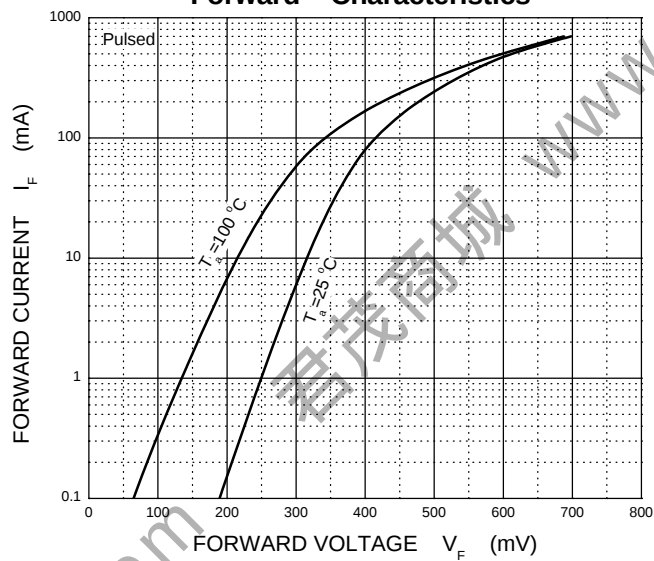


### Reverse Characteristics

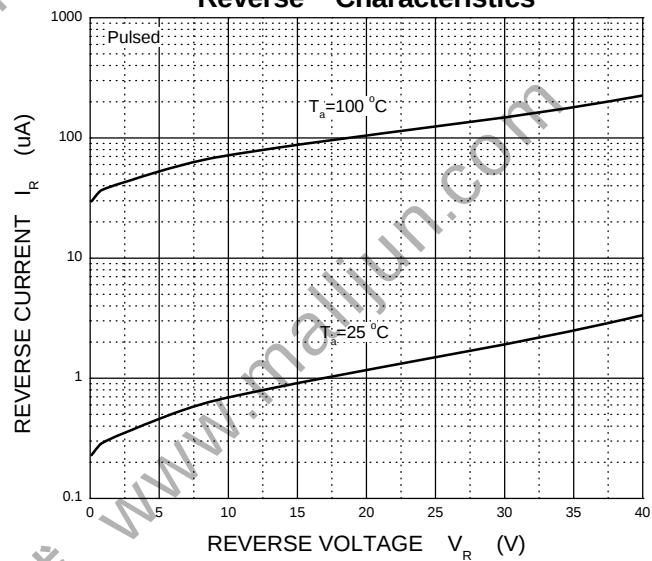


### Capacitance Characteristics

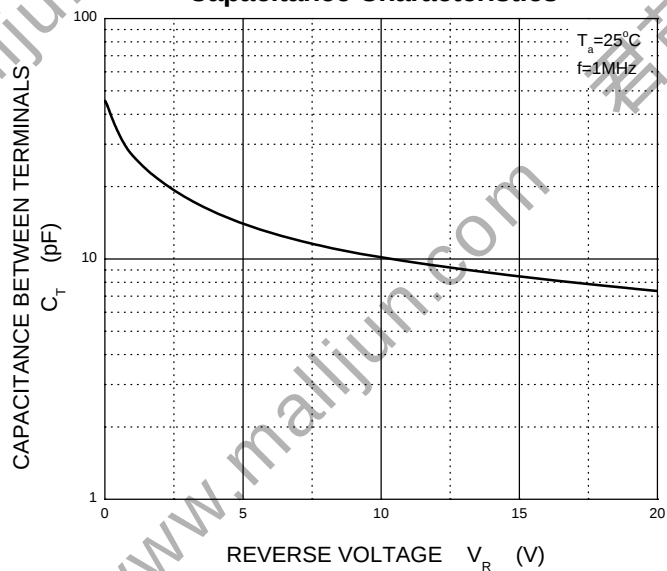

### Power Derating Curve

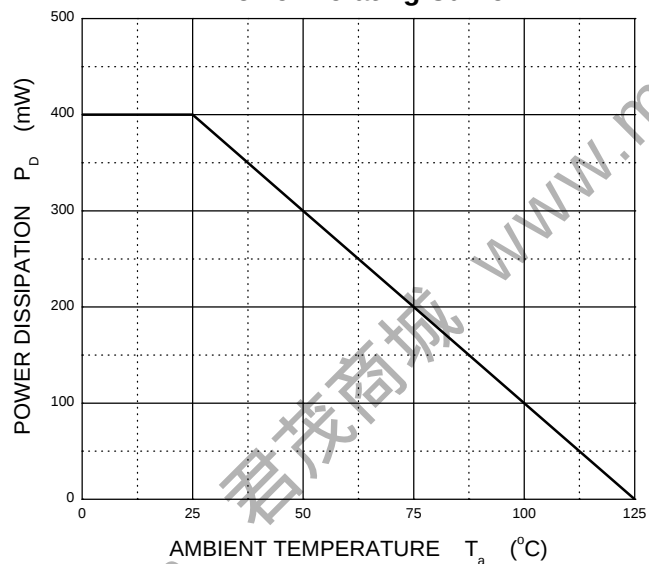


## SOD-123 Package Outline Dimensions

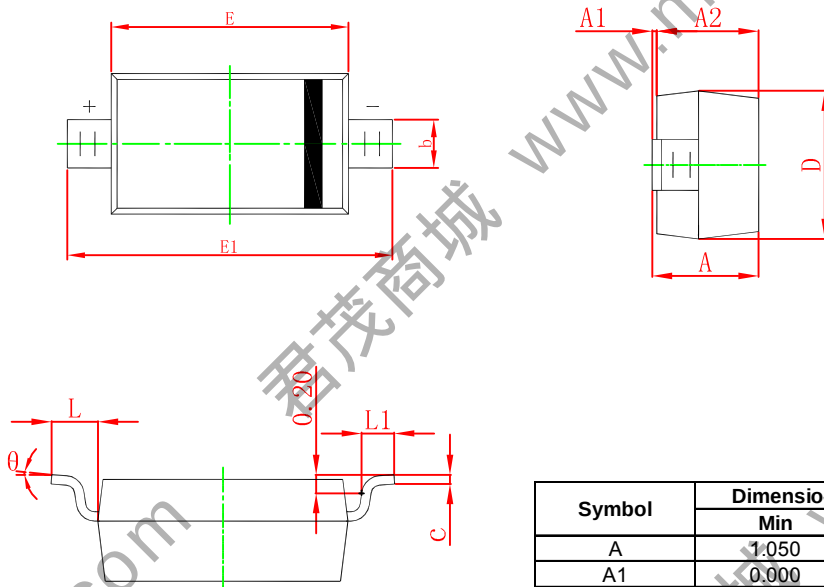

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 1.050                     | 1.250 | 0.041                | 0.049 |
| A1     | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2     | 1.050                     | 1.150 | 0.041                | 0.045 |
| b      | 0.450                     | 0.650 | 0.018                | 0.026 |
| c      | 0.080                     | 0.150 | 0.003                | 0.006 |
| D      | 1.500                     | 1.700 | 0.059                | 0.067 |
| E      | 2.600                     | 2.800 | 0.102                | 0.110 |
| E1     | 3.550                     | 3.850 | 0.140                | 0.152 |
| L      | 0.500 REF                 |       | 0.020 REF            |       |
| L1     | 0.250                     | 0.450 | 0.010                | 0.018 |
| θ      | 0°                        | 8°    | 0°                   | 8°    |

## SOD-123 Suggested Pad Layout

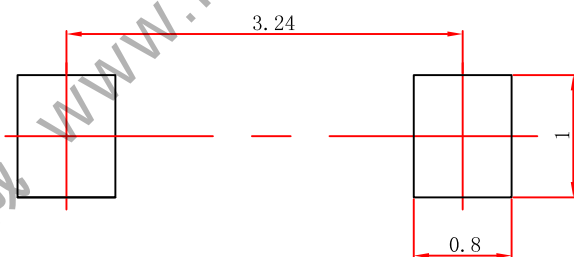


- Note:**
- 1.Controlling dimension:in millimeters.
  - 2.General tolerance:± 0.05mm.
  - 3.The pad layout is for reference purposes only.

### NOTICE

JCET reserve the right to make modifications,enhancements, improvements, corrections or other changes without further notice to any product herein.JCET does not assume any liability arising out of the application or use of any product described herein.

SOD-123 Tape and Reel


SOD-123 Embossed Carrier Tape

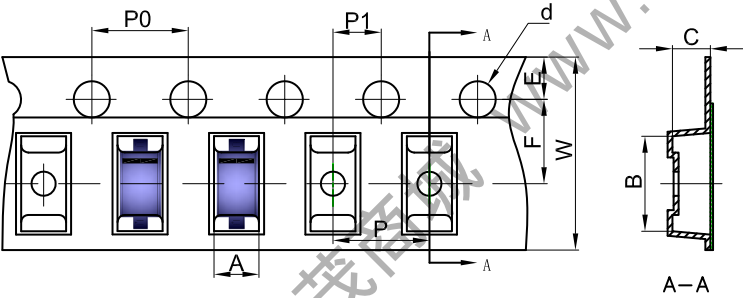


Packaging Description:  
SOD-123 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

| Dimensions are in millimeter |      |      |      |       |      |      |      |      |      |      |
|------------------------------|------|------|------|-------|------|------|------|------|------|------|
| Pkg type                     | A    | B    | C    | d     | E    | F    | P0   | P    | P1   | W    |
| SOD-123                      | 1.85 | 3.95 | 1.57 | Ø1.55 | 1.75 | 3.50 | 4.00 | 4.00 | 2.00 | 8.00 |

SOD-123 Tape Leader and Trailer

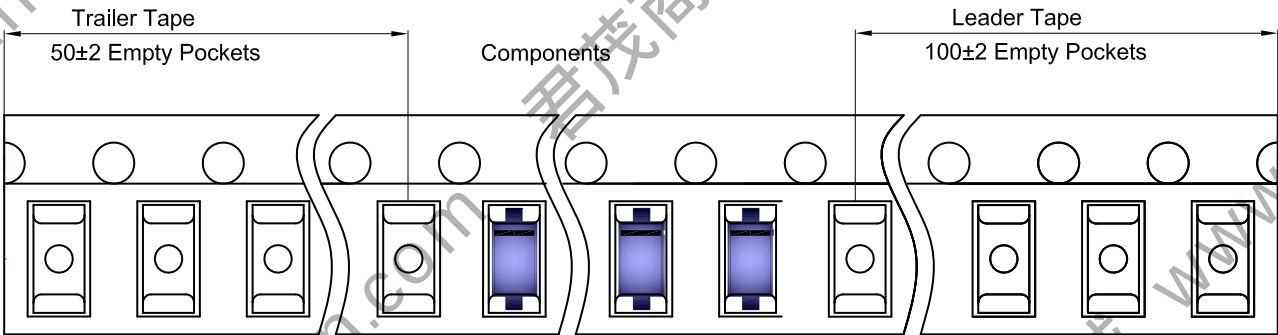

SOD-123 Reel

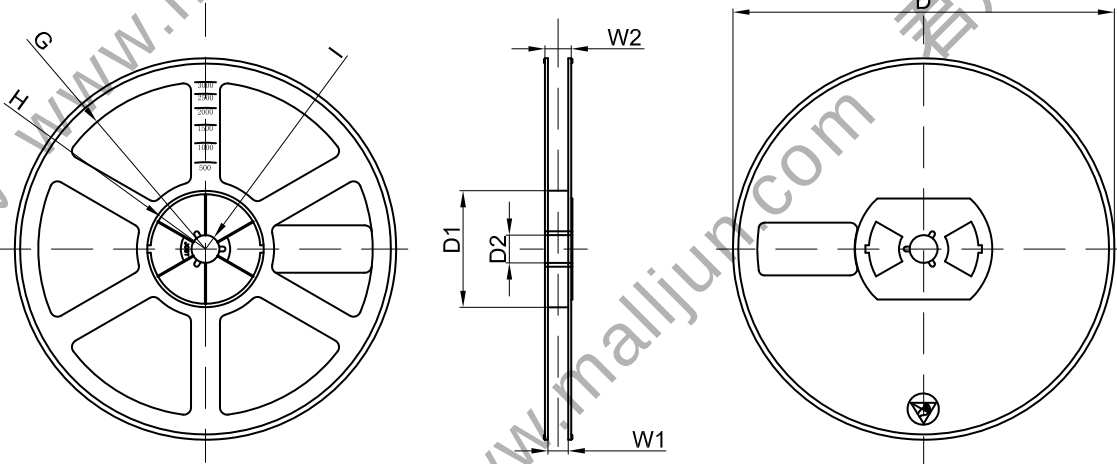

| Dimensions are in millimeter |         |       |       |        |        |       |      |       |
|------------------------------|---------|-------|-------|--------|--------|-------|------|-------|
| Reel Option                  | D       | D1    | D2    | G      | H      | I     | W1   | W2    |
| 7"Dia                        | Ø178.00 | 54.40 | 13.00 | R78.00 | R25.60 | R6.50 | 9.50 | 12.30 |

| REEL     | Reel Size | Box        | Box Size(mm) | Carton      | Carton Size(mm) | G.W.(kg) |
|----------|-----------|------------|--------------|-------------|-----------------|----------|
| 3000 pcs | 7 inch    | 45,000 pcs | 203×203×195  | 180,000 pcs | 438×438×220     |          |